

CSE 547 / CSEP 590A: Spark Tutorial

Topics


- Overview
- Useful Spark Actions and Operations
- Colab 0
- Help session

Setup

- Follow instructions in Colab 0
- Ed Discussion
- Office Hour

Deployment Options

- Local
- Stand-alone clusters
- Managed clusters
 - e.g. YARN

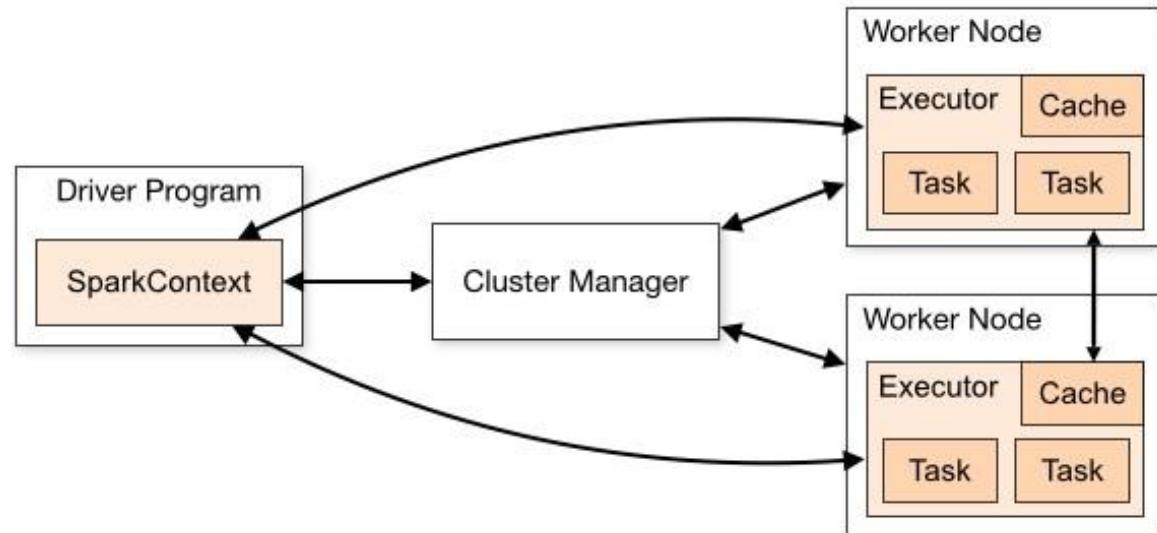

Resilient Distributed Dataset (RDD)

- Contain various data type
 - Int, String, Pair ...
- Immutable
- Lazily computed
- Cached
- Pair RDD: RDD that only contains tuples of 2 elements
 - (key, value)

RDD Actions

The following actions Do Not produce new RDDs

- Debug, output
- `take(n)`
- `collect()`
- `count()`
- `saveAsTextFile(path)`
- `foreach(f)`

RDD Operation: map

- RDD.map(f)
- Return a new RDD by applying a function to each element of this RDD

```
>>> rdd = sc.parallelize(["b", "a", "c"])
>>> sorted(rdd.map(lambda x: (x, 1)).collect())
[('a', 1), ('b', 1), ('c', 1)]
```

RDD Operation: flatMap

- RDD.flatMap(f)
- Return a new RDD by first applying a function to all elements of this RDD, and then flattening the results.

```
>>> rdd = sc.parallelize([2, 3, 4])
>>> sorted(rdd.flatMap(lambda x: range(1, x)).collect())
[1, 1, 1, 2, 2, 3]
```

[2, 3, 4] -> [[1], [1, 2], [1, 2, 3]] -> [1, 1, 1, 2, 2, 3]

RDD Operation: mapValues

- PairRDD.mapValues(f)
- Pass each value in the key-value pair RDD through a map function without changing the keys; this also retains the original RDD's partitioning.

```
>>> x = sc.parallelize([
    ("a", ["apple", "banana",
    "lemon"]), ("b", ["grapes"])
])

>>> def f(x): return len(x)
>>>
x.mapValues(f).collect()
[('a', 3), ('b', 1)]
```

RDD Operation: flatMapValue

- PairRDD.flatMapView
- Pass each value in the key-value pair RDD through a flatMap function.

```
>>> x = sc.parallelize([("a", ["x", "y", "z"]), ("b", ["p", "r"])] )  
>>> def f(x): return x  
>>> x.flatMapValues(f).collect()  
[('a', 'x'), ('a', 'y'), ('a', 'z'), ('b', 'p'), ('b', 'r')]
```

RDD Operation: filter

- RDD.filter(f)
- Return a new RDD that only contains the element the function f returns true on.

```
>>> rdd = sc.parallelize([1, 2, 3, 4, 5])
>>> rdd.filter(lambda x: x % 2 == 0).collect()
[2, 4]
```

RDD Operation: groupByKey

- PairRDD.groupByKey()
- Group values with the same key together.
- Wide operation

```
>>> rdd = sc.parallelize([("a", 1), ("b", 1), ("a", 2)])
>>> result = rdd.groupByKey().collect()
>>> print(result)
[('a', <pyspark.resultiterable.ResultIterable object at
0x10ffad8d0>), ('b', <pyspark.resultiterable.ResultIterable object
at 0x10ffad9b0>)]

>>> print([(pair[0], [value for value in pair[1]]) for pair in
result])
[('a', [1, 2]), ('b', [1])]
```

RDD Operation: reduceByKey

- PairRDD.reduceByKey(f)
- Merge the values for each key using an associative and commutative reduce function.

```
>>> from operator import add
>>> rdd = sc.parallelize([("a", 1), ("b", 1), ("a", 1), ("a", 2)])
>>> sorted(rdd.reduceByKey(add).collect())
[('a', 4), ('b', 1)]
```

RDD Operation : sortBy

- RDD.sortBy(keyfunc)
- Sorts this RDD by the given keyfunc

```
>>> tmp = [ ('a', 1), ('b', 2), ('1', 3), ('d', 4), ('2', 5) ]  
>>> sc.parallelize(tmp).sortBy(lambda x: x[0]).collect()  
[ ('1', 3), ('2', 5), ('a', 1), ('b', 2), ('d', 4) ]  
  
>>> sc.parallelize(tmp).sortBy(lambda x: x[1]).collect()  
[ ('a', 1), ('b', 2), ('1', 3), ('d', 4), ('2', 5) ]
```

RDD Operation: subtract

- RDD.subtract(RDD)
- Return a new RDD containing each value in the original RDD that not in the other RDD.

```
>>> x = sc.parallelize([("a", 1), ("b", 4), ("b", 5), ("a", 3)])
>>> y = sc.parallelize([("a", 3), ("c", None)])
>>> sorted(x.subtract(y).collect())
[('a', 1), ('b', 4), ('b', 5)]
```

RDD Operatoin: join

- `PairRDD.join(PairRDD)`
- For each pair of pairs in the original and the other RDDs that have the same key, join their values together in the result RDD.

```
>>> x = sc.parallelize([("a", 1), ("b", 4)])
>>> y = sc.parallelize([("a", 2), ("a", 3)])
>>> sorted(x.join(y).collect())
[(('a', (1, 2)), ('a', (1, 3)))]
```

Example: Word Count

```
conf = SparkConf()
sc = SparkContext(conf=conf)

lines = sc.textFile(sys.argv[1])

words = lines.flatMap(lambda l: re.split(r'[^\w]+', l))
pairs = words.map(lambda w: (w, 1))
counts = pairs.reduceByKey(lambda n1, n2: n1 + n2)
counts.saveAsTextFile(sys.argv[2])

sc.stop()
```

Example: Word Count

```
words = lines.flatMap(lambda l:  
re.split(r'[^\w]+', l))  
  
pairs = words.map(  
    lambda w: (w, 1)  
)  
counts = pairs.reduceByKey(  
    lambda n1, n2: n1 + n2  
)  
counts.saveAsTextFile(sys.argv[2])  
sc.stop()
```

```
lines = ['I love data mining.',  
'data mining is great.]
```

```
words = ['I', 'love', 'data',  
'mining', 'data', 'mining',  
'is', 'great']
```

```
pairs = [('I', 1), ('love', 1),  
(('data', 1), ('mining', 1),  
(('data', 1), ('mining', 1),  
(('is', 1), ('great', 1)]
```

```
counts = [(('I', 1), ('love', 1),  
(('data', 2), ('mining', 2),  
(('is', 1), ('great', 1)]
```

Colab 0

References

- PySpark 2.4.0 documentation

<https://spark.apache.org/docs/2.4.0/api/python/pyspark.html>